


1000A SERIES CONCEALED HOLDERS & STOPS WITH A110WT WIDE THROW HINGE

• CONCEALED MOUNT • HEAVY DUTY • ADJUSTABLE
•1010A HOLD-OPEN •1020A STOP •1030A FRICTION

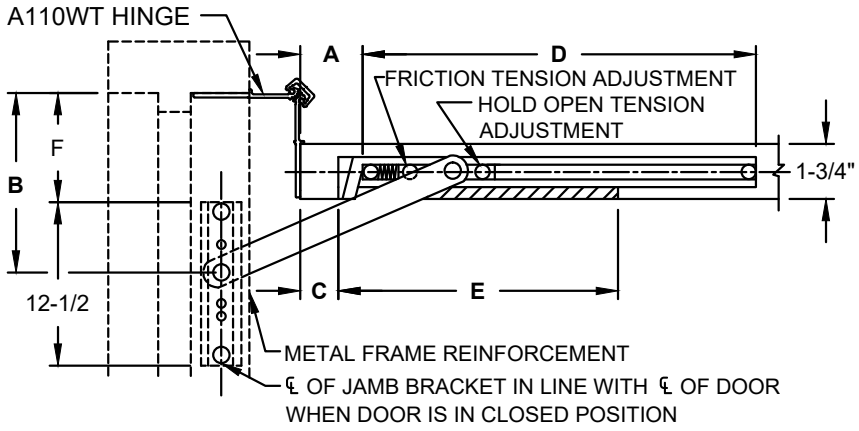

A = FROM HINGE EDGE OF DOOR TO START OF CHANNEL CUT-OUT
B = FROM HINGE EDGE OF FRAME TO ℄ OF JAMB BRACKET PIVOT POINT (REF. ONLY)
C = FROM HINGE EDGE OF DOOR TO START OF ARM CUT-OUT
D = CHANNEL CUT-OUT LENGTH
E = ARM CUT-OUT
F = FROM HINGE SIDE OF FRAME TO START OF JAMB BRACKET CUT-OUT

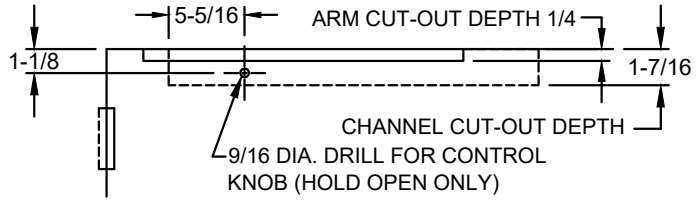

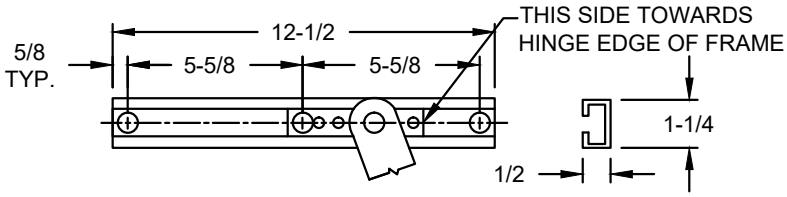

ADJUSTABLE JAMB BRACKET

a. JAMB BRACKET SLIDING CAM MUST BE INSTALLED WITH SHORT END TOWARD HINGE EDGE OF FRAME
b. AFTER INSTALLATION, TIGHTEN (3) SET SCREWS IN JAMB BRACKET WITH 5/32 ALLEN WRENCH AT SELECTED DEGREE USING "B" DIMENSION AS REFERENCE.

SCREW DETAIL			
	QTY	WOOD	METAL
JAMB	3	#14 x 1-1/2" FLAT HEAD WOOD SCREW	1/4-20 x 3/4" FLAT HEAD MACHINE SCREW
DOOR	2	#18 x 2-1/2" FLAT HEAD WOOD SCREW	5/16-18 x 1-1/2" TRUSS HEAD MACHINE SCREW

1-3/4 THICK DOOR												
MODEL NO.	DOOR FRAME OPENING	A	B (REFERENCE ONLY)* DEGREE OF DOOR OPENING						C	D	E	F
			85°	90°	95°	100°	105°	110°				
• 1011A • 1021A • 1031A		4-1/4	7-5/8	5-13/16	-	-	-	-	2	20-5/8	20	2
• 1012A • 1022A • 1032A		4-5/16	9-15/16	8-9/16	7-1/8	-	-	-	1-1/2	23-7/8	23-3/4	2-1/8
• 1013A • 1023A • 1033A		5-9/16	10-7/8	9-1/8	7-13/16	5-7/8	5-7/16	-	0	26-1/4	27-1/2	1-9/16
• 1014A • 1024A • 1034A		7-13/16	-	14-1/16	12-1/2	11-1/8	10	9	4	30	31-1/8	4-5/8
• 1015A • 1025A • 1035A		5-9/16	-	14-11/16	12-7/8	11-3/8	9-15/16	8-7/8	4-1/2	31	35-1/4	5-1/4

NOTES:
1. REVERSIBLE/ NON - HANDED
2. FOR SINGLE ACTING DOORS ONLY
3. ALWAYS REQUEST LATEST TEMPLATE/ DRAWING FOR NEW INSTALLATIONS.
4. ALL DIMENSIONS ARE IN INCHES.
5. DRAWING IS NOT TO SCALE.
6. ALL DRILLING AND TAPPING TO BE DONE IN FIELD.
* 7. DIMENSIONS B = HOLD-OPEN FOR HOLDERS, OPENING FOR STOPS

1000AWT-01.DWG

ARCHITECTURAL BUILDERS HARDWARE
FAMILY-OWNED SINCE 1991 & MADE IN ITASCA, USA.

ABHMFG.COM
abhinfo@abhmfg.com
630.875.9900