


1000SL SERIES SLIM-LINE CONCEALED HOLDERS & STOPS

WITH A110 WIDE THROW HINGE

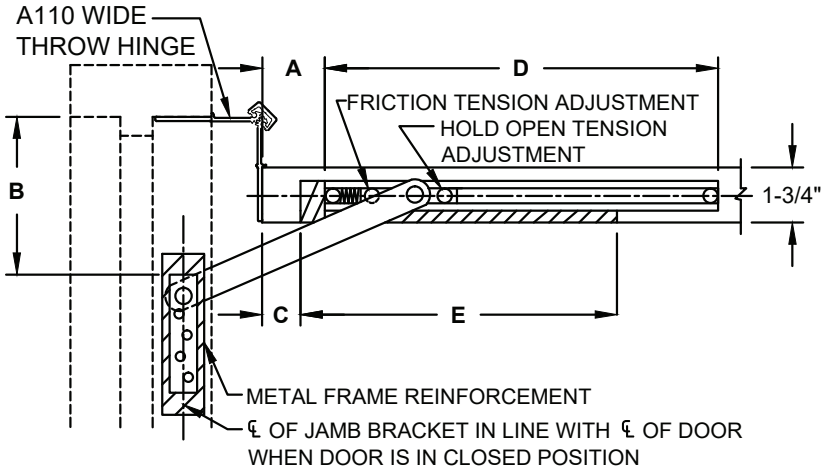


A = FROM HINGE EDGE OF DOOR TO START OF CHANNEL CUT-OUT
B = FROM HINGE EDGE OF FRAME TO START OF JAMB BRACKET CUT OUT
C = FROM HINGE EDGE OF DOOR TO START OF ARM CUT-OUT
D = CHANNEL CUT OUT LENGTH
E = ARM CUT OUT

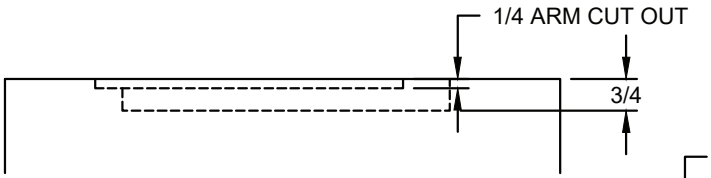


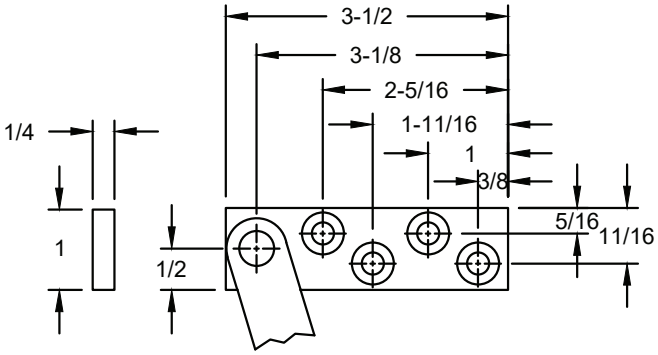

JAMB BRACKET

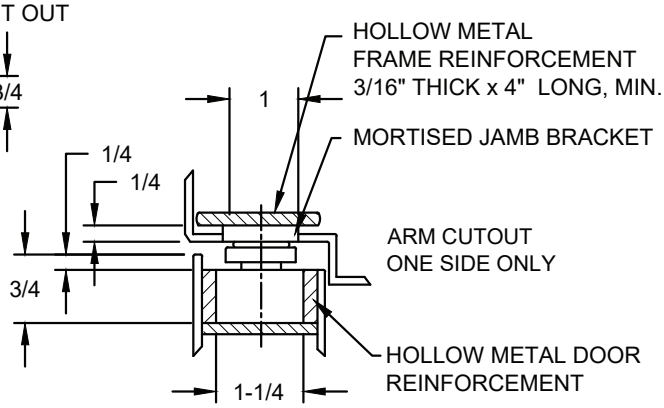

SINGLE ACTING DOOR



NOTES:
1. REVERSIBLE/ NON - HANDED
2. FOR SINGLE ACTING DOORS ONLY
3. ALWAYS REQUEST LATEST TEMPLATE/ DRAWING FOR NEW INSTALLATIONS.
4. ALL DIMENSIONS ARE IN INCHES.
5. DRAWING IS NOT TO SCALE.
6. ALL DRILLING AND TAPPING TO BE DONE IN FIELD.

1000 SLT REPLACES THE JAMB BRACKET WITH A THREADED NYLON JAMB PIVOT SCREW, ADD 3/8" TO B DIM. DRILL & TAP FRAME FOR 3/8-24 M.S. NO FRAME PREP NEEDED. NOTE: 1/4" OR GREATER REINFORCEMENT RECOMMENDED

SCREW DETAIL			
	QTY	WOOD	METAL
JAMB	4	#14 x 1-1/2 FLAT HEAD WOOD SCREW	1/4-20 x 3/4 FLAT HEAD MACHINE SCREW
DOOR	2	#18 x 2-1/2 FLAT HEAD WOOD SCREW	5/16-18 x 1-1/2 FLAT HEAD MACHINE SCREW

1000SLWT-1-02.DWG

ARCHITECTURAL BUILDERS HARDWARE
FAMILY-OWNED SINCE 1991 & MADE IN ITASCA, USA.

ABHMFG.COM
abhinfo@abhmfg.com
630.875.9900

1000SL CONCEALED HOLDERS & STOPS WITH A110WT WIDE THROW HINGE

•1010SL HOLD-OPEN •1020SL STOP • FOR 1-3/4 THICK DOOR

1. FOR DEAD STOP ADD 7/8" TO "A" DIMENSION
2. FOR 1000SLT ADD 3/8" TO "B" DIMENSION
3. ALL DIMENSIONS ARE IN INCHES.
4. "A" & "C" DIMENSIONS MEASURED FROM HINGE EDGE OF DOOR.
5. "B" DIM. MEASURED FROM HINGE EDGE OF FRAME

DEGREE		85° H.O.				90° H.O.				95° H.O.				
MODEL NO.	DOOR OPENING	A	B	C	E	A	B	C	E	A	B	C	E	D
● 1011SL ● 1021SL	27 TO 29-15/16	5-3/4	4-1/2	2-1/2	17-3/4	5-3/8	4-1/4	0	20	—	—	—	—	17-3/8
● 1012SL ● 1022SL	30 TO 35-15/16	6-7/8	6-1/2	5-1/2	18-1/8	6-5/8	6	5-1/8	18	6-1/8	5-1/2	3-3/4	19	18-13/16
● 1013SL ● 1023SL	36 TO 39-15/16	11-1/8	8	7	22-3/8	10-5/8	7-1/2	6-1/2	22-1/2	10-3/16	7	6	22-1/2	20-1/8
● 1014SL ● 1024SL	40 TO 43-15/16	13-15/16	9	8	25-1/2	13-3/8	8-1/2	7-1/2	25-1/2	12-7/8	8	7	25-1/2	21-5/16
● 1015SL ● 1025SL	44 TO 52	16-7/8	10	9	28-1/4	16-3/16	9-3/8	8-3/8	28-3/8	15-5/8	8-3/4	7-3/4	28-3/8	22-7/16

DEGREE		100° H.O.				105° H.O.				110° H.O.				
MODEL NO.	DOOR OPENING	A	B	C	E	A	B	C	E	A	B	C	E	D
● 1011SL ● 1021SL	27 TO 29-15/16	—	—	—	—	—	—	—	—	—	—	—	—	17-3/8
● 1012SL ● 1022SL	30 TO 35-15/16	5-15/16	5	2-1/4	20	—	—	—	—	—	—	—	—	18-13/16
● 1013SL ● 1023SL	36 TO 39-15/16	9-13/16	6-1/2	5-1/2	22-1/2	9-9/16	6	4-3/4	22-3/4	9-3/8	5-1/2	0	27	20-1/8
● 1014SL ● 1024SL	40 TO 43-15/16	12-1/2	7-1/2	6-1/2	25-3/8	12-1/8	7	6	25-7/8	11-7/8	6-1/2	5-1/2	25-1/2	21-5/16
● 1015SL ● 1025SL	44 TO 52	15-1/8	8-1/4	7-1/4	28-3/8	14-3/4	7-3/4	6-3/4	28-3/8	14-1/2	7-1/4	6-1/4	28-3/8	22-7/16

1000SLWT-2-02.DWG