

4400HC HOLD CLOSED SERIES SURFACE STOPS




OFFSET PIVOT

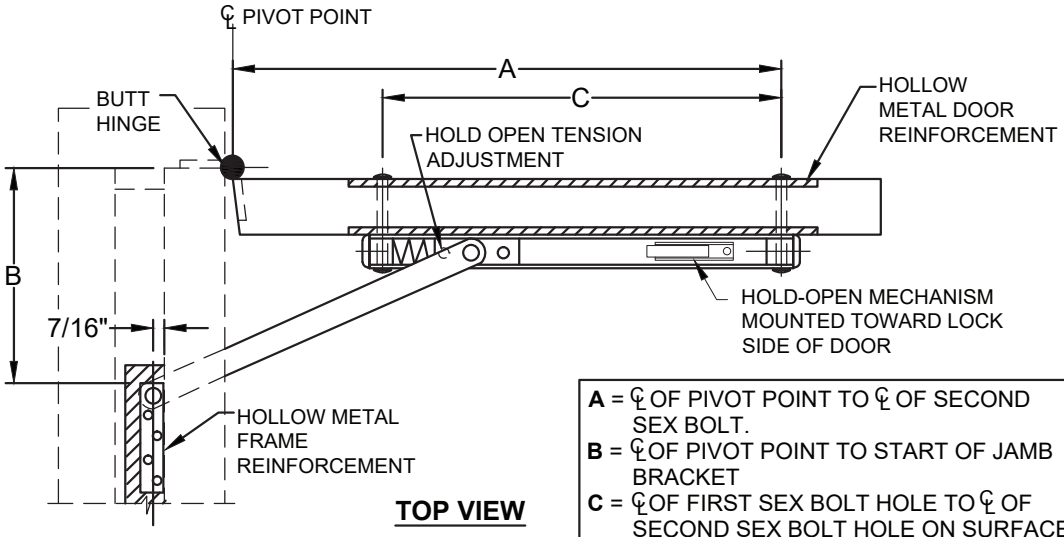


TOP VIEW


A = ℄ OF PIVOT POINT TO ℄ OF SECOND SEX BOLT.
B = ℄ OF PIVOT POINT TO START OF JAMB BRACKET
C = ℄ OF FIRST SEX BOLT HOLE TO ℄ OF SECOND SEX BOLT HOLE ON SURFACE MOUNT CHANNEL

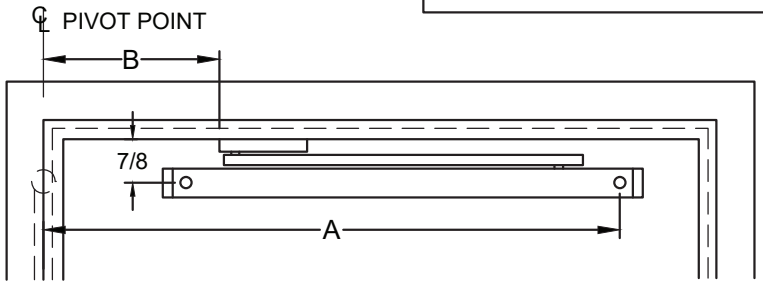

FRONT VIEW
PUSH SIDE OF DOOR

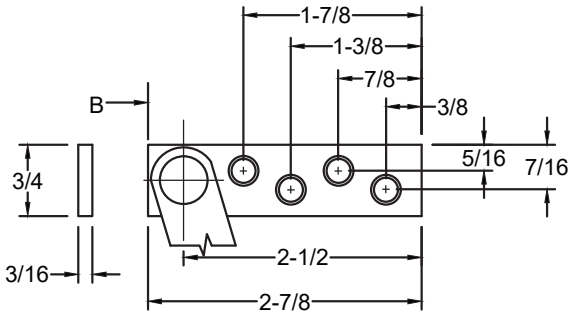

JAMB BRACKET

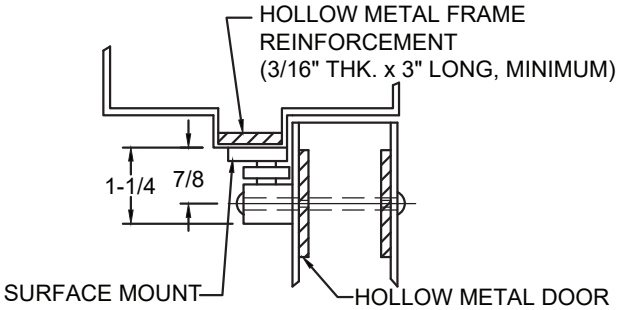

SIDE VIEW
CROSS SECTION

SCREW DETAIL			
	QTY	WOOD	METAL
JAMB	4	• #10 x 1-1/2" FLAT HEAD WOOD SCREW	• 10-32 x 1/2" FLAT HEAD MACHINE SCREW
DOOR	2	• 10-32 x 1-1/2" TRUSS HEAD MACHINE SCREW • 5/16" DIA. SEX BOLT	

NOTES:
1. REVERSIBLE/ NON - HANDED
2. FOR SINGLE ACTING DOORS ONLY
3. ALL DRILLING & TAPPING TO BE DONE IN FIELD.
4. ALWAYS REQUEST LATEST TEMPLATE/ DRAWING FOR NEW INSTALLATIONS.
5. ALL DIMENSIONS ARE IN INCHES.
6. DRAWING IS NOT TO SCALE

4400HC-1-00.DWG

ARCHITECTURAL BUILDERS HARDWARE
FAMILY-OWNED SINCE 1991 & MADE IN ITASCA, USA.

ABHMFG.COM
abhinfo@abhmfg.com
630.875.9900

4400HC HOLD CLOSED SERIES SURFACE FRICTION HOLDERS & STOPS,

SURFACE MOUNT
• 4420 STOP • 4430 FRICTION

1. FOR DEAD STOP ADD 3/4" TO "A" DIMENSION
2. ALL DIMENSIONS ARE IN INCHES.

* BUTT & OFFSET PIVOT ONLY

DOOR THICKNESS 1-3/4"
BUTT HINGE, OFFSET PIVOT

DEGREE		85° H.O.		90° H.O.		95° H.O.		100° H.O.		105° H.O.		110° H.O.		
MODEL NO.	DOOR OPENING	A	B	A	B	A	B	A	B	A	B	A	B	C
•4421HC	18" TO 23-15/16"	* 16-9/16	* 5-9/16	* 15-13/16	* 4-13/16	* 15-9/16	* 4-1/2	—	—	—	—	—	—	14-7/16
•4422HC	24" TO 29-15/16"	21-11/16	5-15/16	21-1/4	5-9/16	20-15/16	5-3/16	20-11/16	4-7/8	20-3/8	4-11/16	21-3/8	4-7/16	15-3/16
•4423HC	30" TO 35-15/16"	25-1/4	7	24-7/8	6-5/8	24-5/8	6-3/8	24-3/16	5-15/16	23-7/8	5-5/8	23-5/8	5-3/8	17-7/16
•4424HC	36" TO 48"	27-13/16	7-3/4	27-7/16	7-1/4	27	6-7/8	26-11/16	6-7/16	26-5/16	6-3/16	26	5-7/8	18-3/16

ARCHITECTURAL BUILDERS HARDWARE
FAMILY-OWNED SINCE 1991 & MADE IN ITASCA, USA.

ABHMFG.COM
abhinfo@abhmfg.com
630.875.9900